

Dynamic Balancing of the SCARA Robot

Vigen Arakelian and Sébastien Briot

Département de Génie Mécanique et Automatique, L.G.C.G.M. – EA3913
Institut National des Sciences Appliquées (I.N.S.A.)
20 avenue des Buttes de Coësmes, CS 14315
F-35043 Rennes, France
vigen.arakelyan@insa-rennes.fr
sebastien.briot@ens.insa-rennes.fr

Abstract. This paper deals with the complete shaking force and shaking moment balancing of the four degrees of freedom SCARA robot. Dynamic reaction forces on the frame of the manipulator are eliminated by traditional approach making the total mass center of the moving links stationary. Reaction moments on the frame of the manipulator are eliminated by optimal control of the end-effector, which rotates with prescribed acceleration. A numerical simulation carried out on the software ADAMS illustrates that such a balanced SCARA robot transmits no inertia loads to surrounding, i.e. the sum of all ground bearing forces and their moments are eliminated.

1 Introduction

A primary objective in balancing a linkage is to remove or reduce the variable dynamic load it transmits to its frame and surrounding structures. Different approaches and solutions have been developed and documented (Lowen et al., 1983), (Arakelian et al., 2000), (Arakelian and Smith, 2005), but, despite its long history, mechanism balancing theory continues to develop and new approaches and solutions are constantly being reported. A new field for their application is the design of mechanical systems for fast manipulation, which are very efficient for advanced robotic applications. The cancellation of the inertia force (shaking force) transmitted to the robot frame can be achieved by traditional approach, which consists of fixation of the common center of mass of the moving links of the manipulator. The studies devoted to the inertia couple (shaking moment) balancing of high-speed manipulators may be arranged in the following groups.

(i) Balancing by counter-rotations (Berkof, 1973), (Dresig et al., 1994), (Arakelian and Smith, 1999), (Herder and Gosselin, 2004). The aim of this approach is to connect the counterweights with planetary gear trains, which generate the counter-rotations (Fig. 1). The disadvantage of such a balancing is the need for the connection of gears to the oscillating links. The oscillations of the links of the mechanism will create noise unless expensive anti-backlash gears are used.

(ii) Balancing by adding four-bar linkages (Gosselin et al., 2004), (Ricard and Gosselin, 2000). This approach is achieved by building the mechanical system out of modules – four-bar linkages (Fig. 2). The four-bar linkages with prescribed geometric parameters allow the optimum redistribution of the moving mass to achieve the shaking moment balancing. The originality of

such a solution is the balancing of the shaking moment without the counter-rotations. However, the balancing by this method is only reached by a considerably complicated design.

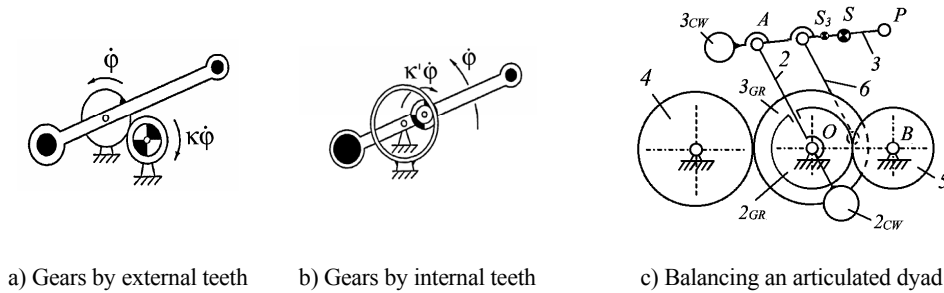


Figure 1. Balancing by counter-rotation (courtesy of C.M. Gosselin).

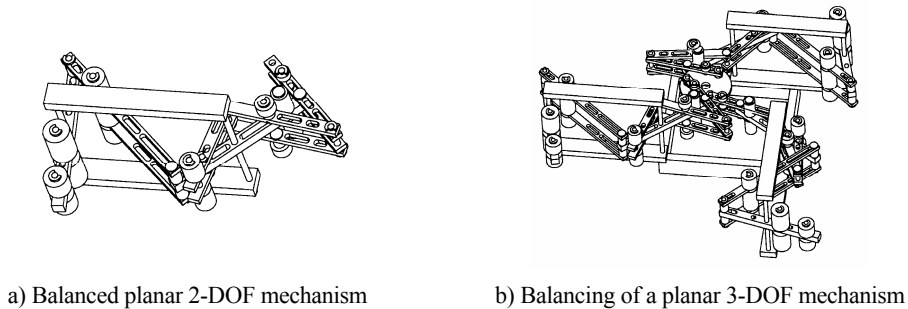


Figure 2. Balancing by adding four-bar linkages (courtesy of C.M. Gosselin).

(iii) Balancing by optimum trajectory planning (Papadopoulos and Abu-Abed, 1994), (Fattah and Agrawal, 2006). In this case, the trajectory is planned in such a way that it brings to the minimal reactions on the base of the robot. Such an approach was applied to a redundant planar manipulator with 3 degrees of freedom and a planar 3-RRR parallel manipulator.

This paper deals with a new solution for shaking moment balancing of manipulators, which is based on the optimum control of the end-effector's rotation about its axis. We illustrate the reactionless feature of such an approach through the four degrees of freedom SCARA robot.

2 SCARA robot: shaking force and shaking moment

The SCARA (Selective Compliance Assembly Robot Arm) is a high-performance robot with relatively simple structure, which is composed of three revolute joints O_1 , O_2 and O_3 (Fig. 3) making it possible to move and orient the end-effector in the horizontal plane (x , y and ϕ) and one prismatic joint d_4 allowing its movement in the vertical direction (z). The robot was developed in the laboratory of Professor Makino at Japon's Yamanashi University (Makino and Furuya, 1982) and it is successfully applied in production industries. Today there are about 240 types of SCARA robots developed by 20 Companies.

Various studies were devoted to this architecture. The singularity analysis and workspace optimization was discussed in the paper (Beiner, 1992). (Roth, 1985) studied this robot to achieve the optimal design for the links to minimize the pick-and-place motion. The dynamics was studied by (Ibrahim et al., 1989), as well as by (Padhy, 1992). (Chen et al., 2001) investigated the kinematic calibration of the 4-DOF SCARA robot. The vibration control for this robot was suggested in the study of (Kang et al., 1997).

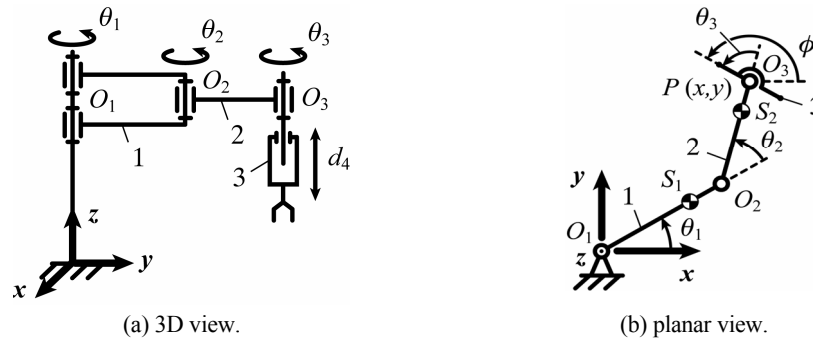


Figure 3. Schematics of the SCARA robot developed at Yamanashi University.


It is well known that one of the fields of SCARA-type robots application is the fast pick-and-place manipulation. With increase of the manipulation speeds it becomes evident that the fast moving elements of mechanical systems bring about undesirable effects, such as vibration and noise. In this paper, for the first time, the dynamic balancing of the SCARA robot is studied.

In order to estimate the variable dynamic loads transmitted to the frame of a SCARA robot we carried out the simulations on the software ADAMS. For this purpose, a standard cycle of pick-and-place motion (25×300 mm in 0.3 s) for fifth-order polynomial trajectory with the following initial and final locations $x_i = 0.15$ mm, $x_f = -0.15$ mm and $y_i = 0.2$ mm, $y_f = 0.2$ mm and $\phi_i = 83$ deg., $\phi_f = 157$ deg. orientation was selected. The geometric and inertia parameters of the robot are the following: $l_{O_1O_2} = 0.125$ mm, $l_{O_2O_3} = 0.225$ mm, $l_{O_1S_1} = 0.0625$ mm, $l_{O_2S_2} = 0.1125$ mm, $m_1 = 1.2$ kg, $m_2 = 2$ kg, $m_3 = 0.5$ kg, $I_1 = 0.014$ kg.m², $I_2 = 0.036$ kg.m², $I_3 = 0.0126$ kg.m², where $l_{O_iO_j}$ corresponds to the length of segment O_iO_j , $l_{O_iS_i}$ to the distance of the centre of masses S_i from the joint centre O_i , m_i is the mass of link i and I_i its axial moment of inertia.


Fig. 4 shows the shaking force and shaking moment variations of unbalanced robot (full line).

3 Shaking force and shaking moment balancing


In order to achieve the dynamic balancing of the SCARA robot, we first have to ensure that it is force-balanced, i.e. statically balanced. With regard to the vertical motion along the z axis, we can cancel the inertia forces by counterweights executing similar but opposite movements to the end-effector motion.

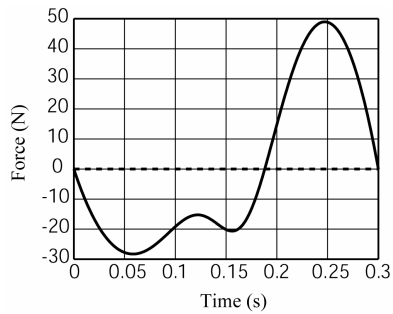


(a) Force along x -axis.

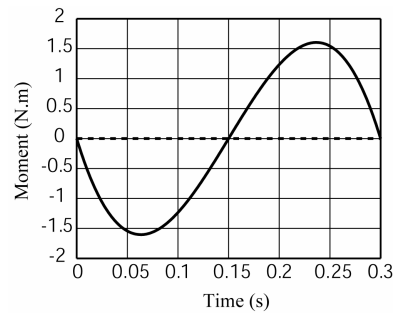


(b) Moment around x -axis.

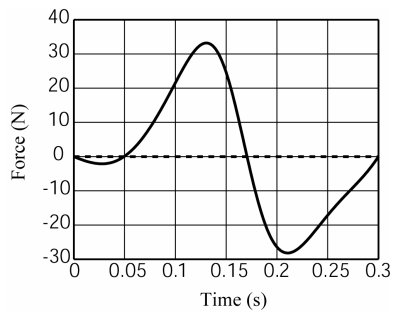


(c) Force along y -axis.

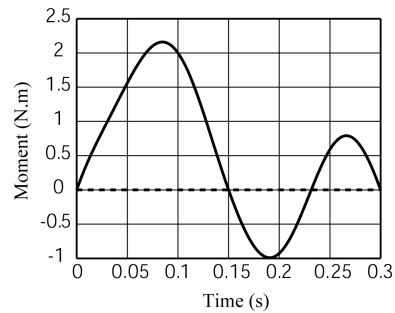

(d) Moment around y -axis.

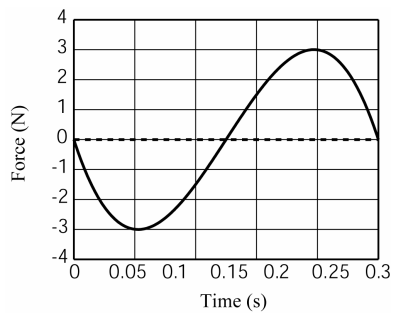

(e) Force along z -axis.

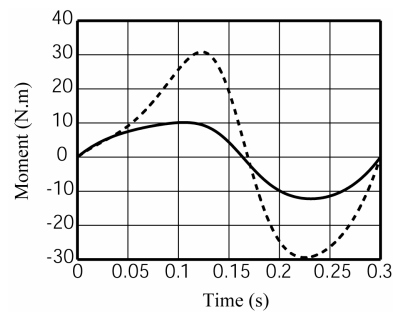

(f) Moment around z -axis.

Figure 4. Variations of the shaking force and shaking moment unbalanced (full line) and statically balanced (dotted line) robot.

Fig. 5 shows one of the design concepts carried out by pulley and cables. It should be noted that similar systems can be built by double slider-crank mechanisms, rhombic pantographs, and screw or cam systems.

Then, it is necessary to balance the shaking forces in the horizontal plane by making the total mass center of the moving links stationary (Fig. 4 – dotted lines). For this purpose, the following conditions may be achieved:

$$l_{O_3S_3} = 0, \quad (1)$$

$$m_3 l_{O_2O_3} = m_2 l_{O_2S_2}, \quad (2)$$

$$m_1 l_{O_1S_1} = (m_2 + m_3) l_{O_1O_2}, \quad (3)$$

taking into account that the centers of masses of links 1 and 2 are not located between the centers of rotation but outside of them.




Figure 5. Balancing of the vertical inertia forces by using a cable and pulley arrangement.

However the force balancing leads to the important increase of the moving masses of the robot, and as a result, its inertia couple (for the simulations, the following parameters for the balanced manipulator are used: $l_{O_1S_1} = -0.117$ mm, $l_{O_2S_2} = -0.047$ mm, $m_1 = 6.2$ kg, $m_2 = 4.8$ kg, $I_1 = 0.175$ kg.m², $I_2 = 0.112$ kg.m²). In Fig. 4 the shaking moment about the z axis is shown (dotted line). We can note that it is increased by a factor 3.

Now that the inertia force balancing is achieved, we have to consider the cancellation of the shaking moment.

The three angles of rotation of the SCARA robot (Fig. 3) are defined by the following relationships:

$$\theta_1 = 2 \tan^{-1} \left(\frac{-l_{O_1O_2} y \pm \sqrt{l_{O_1O_2}^2 (x^2 + y^2) - (l_{O_1O_2}^2 - l_{O_2O_3}^2 + x^2 + y^2)^2}}{l_{O_1O_2}^2 - l_{O_2O_3}^2 + x^2 + y^2 - 2l_{O_1O_2} x} \right), \quad (4)$$

$$\theta_2 = \cos^{-1} \left(\frac{x - l_{O_1O_2} \cos \theta_1}{l_{O_2O_3}} \right) - \theta_1, \quad (5)$$

$$\theta_3 = \phi - \theta_1 - \theta_2, \quad (6)$$

where, x and y are the coordinates of the end-effector. The sign “ \pm ” in Eq. (4) shows that for the same end-effector position and orientation, there are two possible configurations (working modes) of the robot.

We can see from these equations that the angles θ_1 and θ_2 don't depend on the angle θ_3 , i.e. the trajectory generation in the horizontal plan is defined only by the angles θ_1 and θ_2 . It will be used for the shaking moment balancing.

After force balancing, the shaking moment is defined by the following relation:

$$M^{sh} = I_1 \ddot{\theta}_1 + I_2 (\ddot{\theta}_1 + \ddot{\theta}_2) + I_3 (\ddot{\theta}_1 + \ddot{\theta}_2 + \ddot{\theta}_3), \quad (7)$$

where $\ddot{\theta}_i$ is the angular acceleration of link i , x_{Si} , y_{Si} the position of the centre of masses of link i along the x and y axes respectively, and \ddot{x}_{Si} , \ddot{y}_{Si} the acceleration of the centre of masses of link i along the x and y axes respectively.

In equation (7) we have a free parameter $\ddot{\theta}_3 = d^2\theta_3/dt^2$, which defines the orientation of the end-effector between its initial and final positions but has not any influence to the prescribed trajectory.

In order to have a shaking moment of the robot equal to zero for the given trajectory, the acceleration $\ddot{\theta}_3$ for the period $t_i \leq t \leq t_f$ should vary by the following law:

$$\ddot{\theta}_3 = -\frac{I_1 \ddot{\theta}_1 + I_2 (\ddot{\theta}_1 + \ddot{\theta}_2)}{I_3} - \ddot{\theta}_1 - \ddot{\theta}_2 \quad (8)$$

The angular velocity $\dot{\theta}_3(t)$ and angular displacement $\theta_3(t)$ can be determined by simple integration of the obtained values of $\ddot{\theta}_3$.

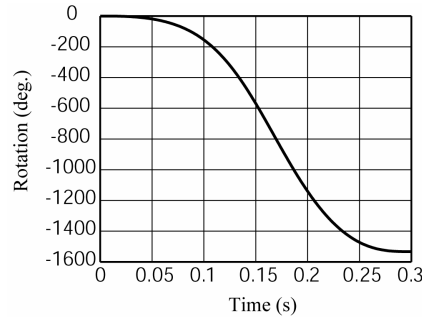


Figure 6. Law of rotation of the end-effector ensuring the shaking moment balancing of the robot.

For examined robot with parameters given above and taking into account that after shaking force balancing, the axial inertia moment of the end-effector is equal to 0.0126 kg.m², we determine the law of rotation of the end-effector (Fig. 6).

It should be noted that the moment of inertia of the end-effector is relatively small compared to the moments of inertia of robot links. Thus, to ensure the balancing of the shaking moment it is necessary that it turns several times during the motion of the robot in the horizontal plane.

Finally, we would like to note that the suggested approach can be also applied to others position-orientation decoupled manipulators. Fig. 7 shows a new architecture of PAMINSA manipulator (Arakelian et al., 2006), (Briot, 2007) with 6 degrees of freedom, in which the generation of translations in the horizontal plane is achieved by the use of the rotating actuators M_1 , M_3 and the vertical translations by the linear actuator M_v . The orientation of the end-effector is carried out by the serial wrist mounted on the platform.

The shaking moment on the frame of this manipulator can be eliminated by optimal control of the serial wrist with prescribed rotation velocities. Our future work will consist in the detailed study of such a balancing with numerical simulations carried out using ADAMS software.

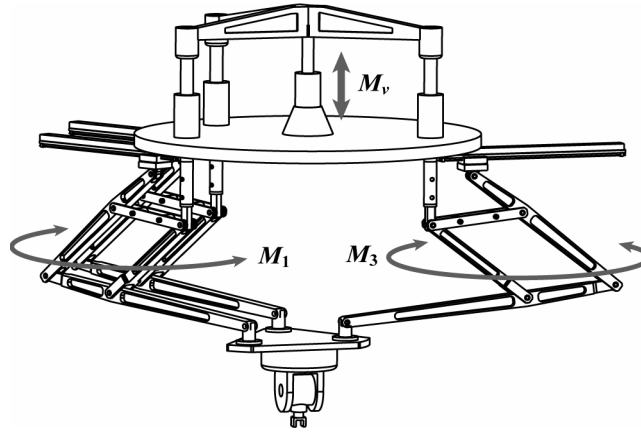


Figure 7. PAMINSA with 6 DOF, in which the Cartesian displacements are carried out by the parallel structure and the orientation by the serial wrist mounted on the platform.

Although the shaking force and shaking moment are eliminated, in practice there are small deviations from the ideal zero reaction. Sources of such deviations include manufacturing errors, neglected friction and clearances in the joints and drive actuators, as well as manipulator unbalancing due to a payload. However, in all these cases the proposed balancing method will eliminate the most significant base reactions due to robot accelerating links.

4 Conclusion

A new field for shaking force and shaking moment balancing is the design of fast parallel manipulators, which are very efficient for advanced robotic applications. In this paper, the shaking force and shaking moment balancing method is developed for the SCARA-type robots with 4 degrees of freedom. The shaking forces of the manipulator in the horizontal plan are eliminated by optimum redistribution of masses making the total mass center of the moving links stationary. With regard to the vertical inertia forces, the opposite motion of the end-effector and the counterweights is applied. The shaking moments on the frame of the manipulator are eliminated by optimal control of the end-effector, which rotates with prescribed velocity. Numerical simulations carried out on the software ADAMS showed that after such a balancing, the manipulator transmits no inertia loads to its surroundings, i.e. the sum of all ground bearing forces and their moments are eliminated.

The advantage of such a balancing is its simplicity. The complete balancing of the shaking moment is achieved without important design modifications. We believe that the balancing of manipulators by means of optimum control of the end-effector is a very promising approach to dynamic performance improvement.

Bibliography

- Arakelian, V.H., and Smith, M.R. (1999). Complete shaking force and shaking moment balancing of linkages. *Mechanism and Machine Theory*. 34(8). 1141-1153.
- Arakelian, V.H., Dahan, M., and Smith, M.R. (2000). A historical review of the evolution of the theory on balancing of mechanisms. In *Proceedings of the International symposium on history of machines and mechanisms*. Dordrecht: Kluwer Academic Publishers. 291-300.
- Arakelian, V.H., and Smith, M.R. (2005). Shaking force and shaking moment balancing of mechanisms: a historical review with new examples. *Transactions of the ASME, Journal of Mechanical Design*. 127. 334-339.
- Arakelian, V., Maurine, P., Briot, S., and Pion, E. (2006). Parallel robot comprising means for setting in motion a mobile element split in two separate subassemblies. Patent WO 2006/021629, January 27.
- Beiner, L. (1972). Singularity avoidance for SCARA robots. *Robotics and Automation Systems*. 10. 63-63.
- Berkof, R.S. (1973). Complete force and moment balancing of inline four-bar linkages. *Mechanism and Machine Theory*. 8(3). 397-410.
- Briot S. (2007). Analysis and optimization of a new family of parallel manipulators with decoupled motions. Ph.D. Thesis, INSA, Rennes, France.
- Chen, I.M., Yang, G., Tan, C.T., and Yeo, S.H. (2001). Local POE model for root kinematic calibration. *Mechanism and Machine Theory*, 36(11-12). 1215-1239.
- Dresig, H., Naake, S., and Rockausen L. (1994). Vollständiger und harmonischer Ausgleich ebener Mechanismen, VDI Verlag, Düsseldorf, 73p.
- Fattah, A., and Agrawal, S.K. (2006). On the design of reactionless 3-DOF planar parallel mechanisms. *Mechanism and Machine Theory*. 41(1). 70-82.
- Gosselin, C.M., Cote, G., and Wu, Y. (2004). Synthesis and design of reactionless tree-degree-of-freedom parallel mechanisms. *IEEE Transactions on Robotics and Automation*. 20(2). 191-199.
- Herder, J.L., and Gosselin, C.M. (2004). A counter-rotary counterweight for light-weight dynamic balancing. In *Proceedings of ASME 2004 DETC/CIEC Conference, September 28 – October 2, Salt Lake City, Utah, USA*. 659-667.
- Ibrahim, M.Y., Cook, C., and Tieu, A.K. (1989). Dynamics characteristics of a SCARA robot subject to NC2 velocity trajectories with different payloads. *Robotics and Computer-Integrated Manufacturing*, 6(3), 259-264.
- Kang, Z.B., Chai, T.Y., Oshima, K., Yang, J.M., and Fujii, S. (1997). Robust vibration control for SCARA-type robot manipulators. *Control Eng. Practice*. 5(7). 907-917.
- Lowen, G.G., Tepper, F.R., and Berkof, R.S. (1983). Balancing of linkages – an Update. *Mechanism and Machine Theory*. 18(3). 213-230.
- Makino, H., and Furuya, N. (1982). SCARA robot and its family. In *Proceedings of the 3rd International Conference on Assembly Automation, Boeblingen, Germany*. 433-444.
- Padhy, S.K. (1992). On the dynamics of SCARA robot. *Robotics and Automation Systems*. 10. 71-78.
- Papadopoulos, E., and Abu-Abed, A. (1994). In *Proceedings of the IEEE International Conference on Robotics and Automation, San Diego, CA*. 1554-1559.
- Ricard, R., and Gosselin, C.M. (2000). On the design of reactionless parallel manipulators. In *Proceedings of the ASME 2000 DETC/CIEC Conference, Baltimore, Maryland, September 10-13*. 1-12.
- Roth, B. (1985). Control and mechanics of simple manipulator systems. In: Hanfusa and Inoue, eds., *Robotic Research* (MIT Press, Cambridge, MA).